

Valor[®] LT2 2700K


October 2023
1/2

Framing Dimensions

1/2" [13 mm] thick non-combustible board required above, on each side and below engine opening (NOT supplied)

Note: Height of cavity may be affected by vent configuration, see Installation Manual for details.

NOTE: This unit requires a solid platform to support it. Combustible framing allowed beneath fireplace. When the appliance is installed directly on carpeting, tile or other combustible material other than wood flooring, the appliance shall be installed on a metal or wood panel extending the full width and recessed depth of the appliance

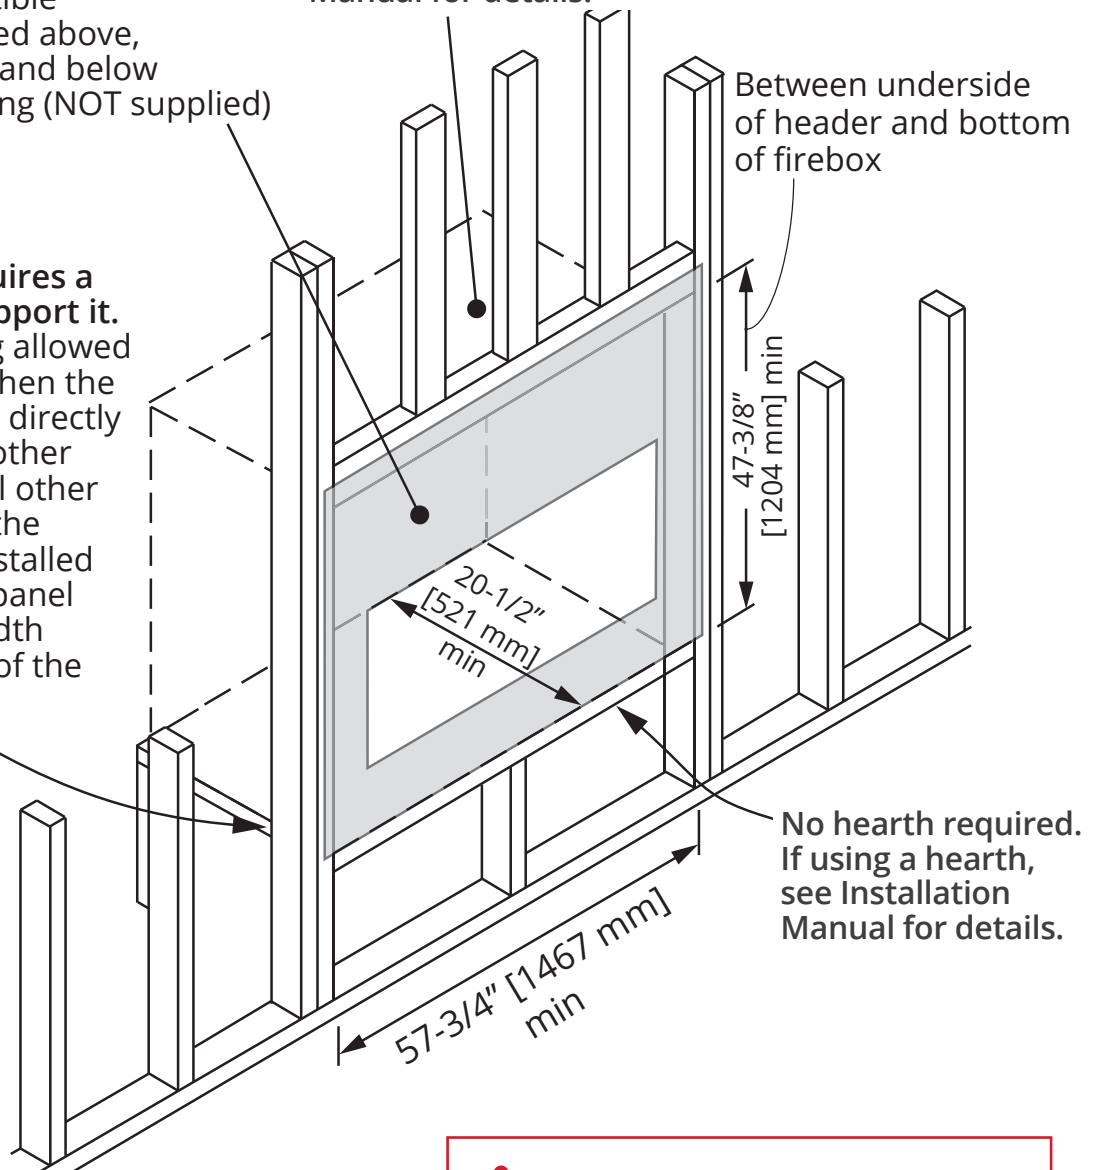

⚠ WARNING

HeatShift System MUST be installed on this appliance! See Installation Manual for HeatShift framing details.

valor[®] LT2 2700K

October 2023
2/2

Framing—Partial shelf, top outlet

