

Co-Linear Venting

Co-Linear Vent Installations

Co-linear portion of vent system may only be installed within a solid-fuel burning fireplace and chimney.

The appliance must not be connected to a chimney flue serving a separate solid-fuel burning appliance.


Requires co-axial to co-linear adapter, two lengths of 2-ply flexible 3-inch diameter chimney liner, both approved for venting gas appliances.

The required fireplace dimensions and clearances are shown in *Dimensions and Location* and *Clearances to Combustible Materials* sections of the LX1 Installation Instructions manual.

Fit the liners to the co-linear adapter paying attention to inlet and exhaust as well as the minimum liner bend radius.

Rules for Co-Linear Venting

- Min 10', max 40' vertical pipe
- Max offset 8' with liners at minimum 45° from horizontal plane
- Restrictor: Use restrictor position listed in vent chart of the LX1 Installation Instructions manual.

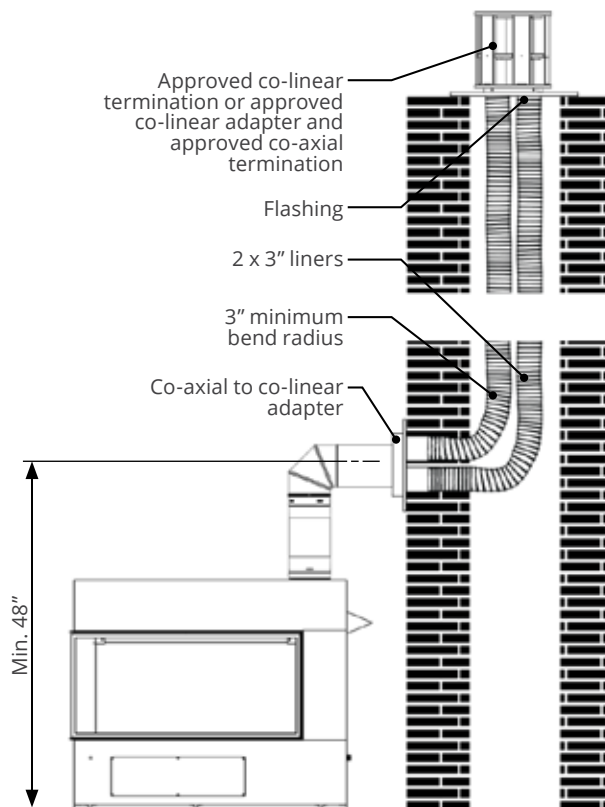

Valor[®] LX1

June 2019
2/2

Co-Linear Venting

