




ROUGH-IN & CLEARANCES MODEL 600 ZCK ZERO CLEARANCE KIT

FOR USE WITH VALOR MODEL 412CN




Rough-In Dimensions

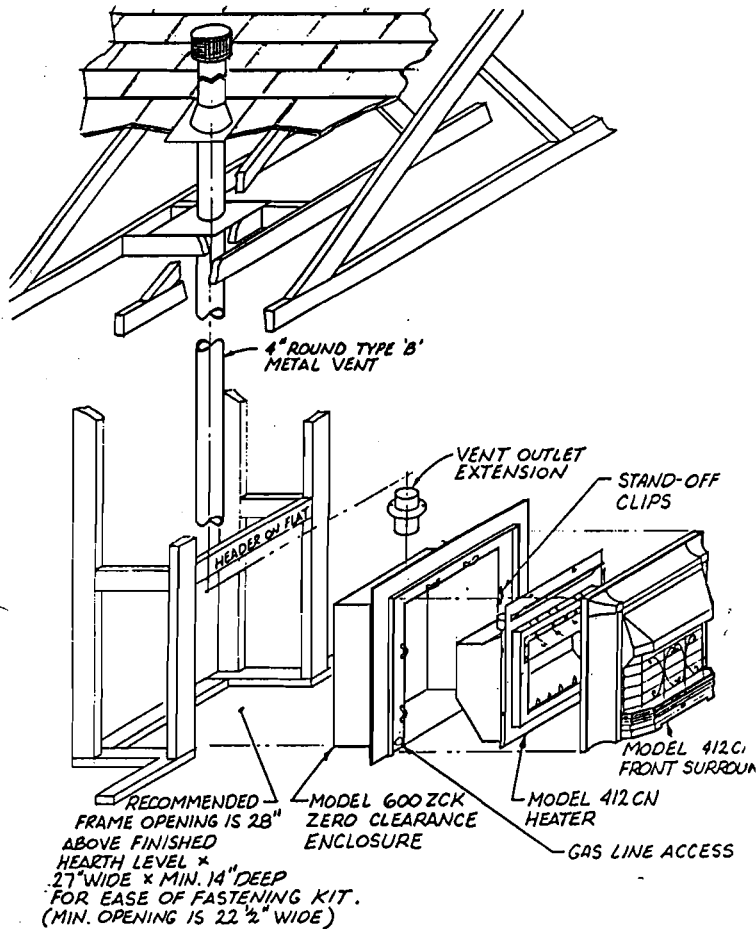

NOTES

1. 600 ZCK required where Model 412CN Heater is installed into frame construction.
2. Zero Clearance Kit should be installed before the wall finish is applied.
3. Minimum rough opening width is 22 1/2", although 27" is recommended for ease of fastening.
4. Edge of surround plate is limit of zero clearance for combustible wall finish. Non-combustible finish, such as tile, may be installed over the surround plate. (See sketch.)

Clearances

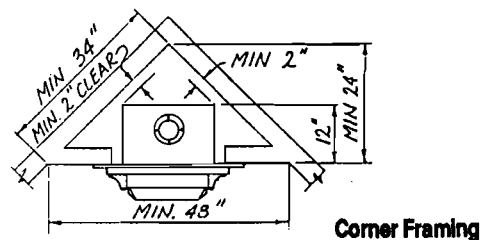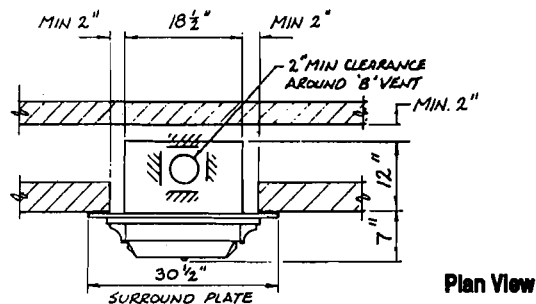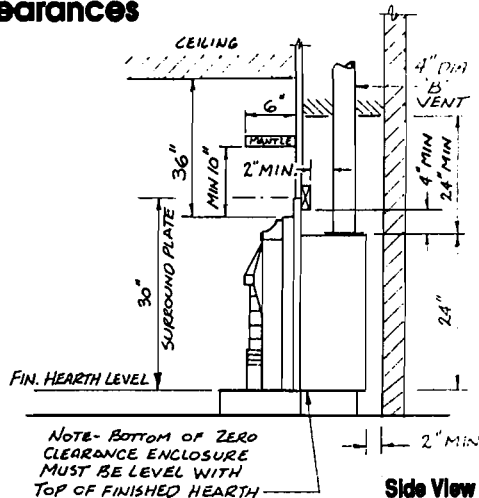

Extent of Combustible Wall Finish

